



▶ Unit A, 11F, Wing Hong Centre, 18 Wing Hong St., Kowloon, Hongkong



▶ 238, Alameda Dr. Carlos d'Assumpcao, Ed. Praca Kin Heng Long, 20G, Macau


Data sheet

Diplexer CDMA+GSM+DCS+UMTS / LTE or WiMax

Model	DT0821/ 27	
Port	GSM+DCS+UMTS	LTE or WiMax
Frequency Range(MHz)	806-960 / 1710-2170	2500 - 2700
VSWR	≤1.3	
Insertion Loss (dB)	≤ 1	≤ 1
Passband Ripple (dB)	≤ 1	≤ 1
Stopband Rejection (dB)	≥ 80	
Max. Power (w)	100	
Impedance (Ω)	50	
Dimension (mm)	180 x 90 x 25	
Temperature Range (°C)	-20 ~ 60	
Connector type	N Female	

Combiner Series Features :

- 2-way and 3-way
- Top Quality Combiners
- Any Combination

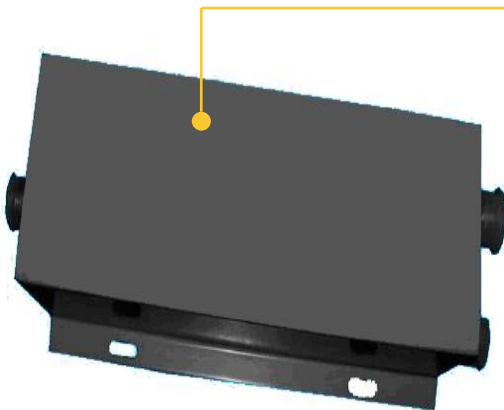

Customizable to Customer Needs:

- N female or SMA connector
- Frequency Range
- Loss / VSWR

Also Available:

- 400 MHz Radio
- 800 MHz Tetra
- CDMA 1x
- CDMA 2000 evdo

