



▶ A05, 9/F, Block 2, Camel Paint Building, 62 Hoi Yuen Road, Kwun Tong, Kowloon, HongKong




▶ 238, Alameda Dr. Carlos d'Assumpcao, Ed. Praca Kin Heng Long, 20G, Macau

Data sheet

The 700— 6000MHz Invisible Antenna DTQJ-0760YGA



**LTE4G
READY**

Now you can install the antenna below ceiling without having to argue with interior designers!

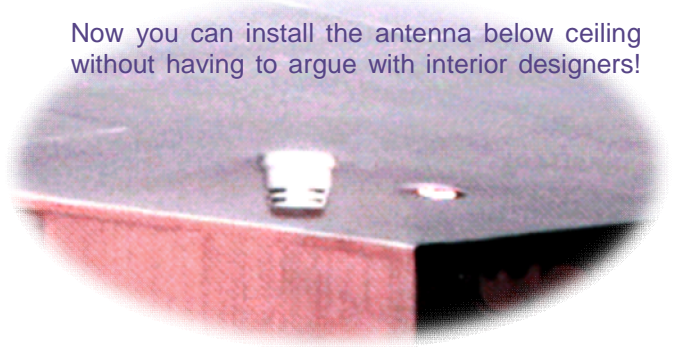


- 2 Invisibility Modes
 - Painted in your choice of color
 - Disguise as a Smoke Detector
- World Leading Technology wideband 700 to 6000 MHz

Model	DTQJ-0760YGA					
Frequency Range (MHz)	700~800	800~960	1425~1700	1700~3100	3100~3450	5150~6000
VSWR	≤ 3	≤1.5	≤1.8	≤1.5	≤2.5	≤2
Gain (dBi)	2	2.5	3	3	3	3.5
Impedance(Ω)	50					
Polarisation	Vertical					
Maximum Power (W)	100					
Connector Location	Bottom					
Connector Type	N female					
Dimension (mm)	Φ94×83 (Reflector Φ254)					
Weight (Kg)	0.7					

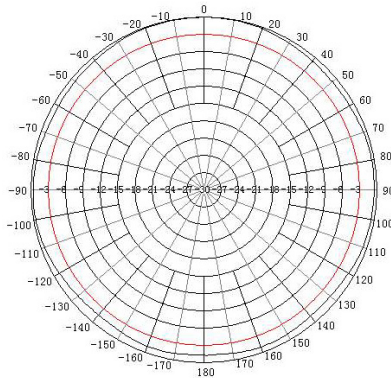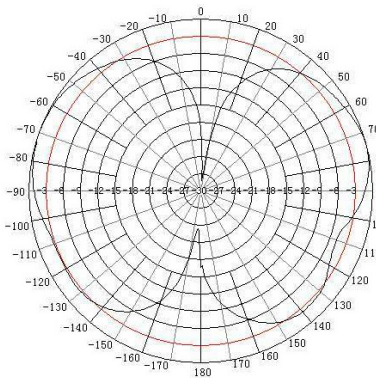

Normal Ceiling Mount



Smoke Detector Mount

